


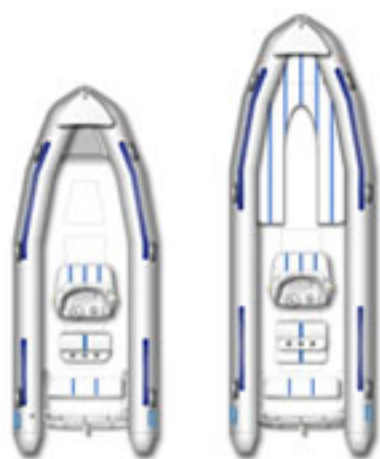

TECHNICAL SPECS.

[EXPLORER DELUXE]

TABLE
SPECIFICATIONS

	ASCL-6.5	ASCL-8.0
Overall Length	6.43m	7.80m
Inside Length	5.62m	6.93m
Overall Width	2.49m	2.50m
Inside Width	1.53m	1.54m
Tube Diameter	480mm	480mm
No. of Passengers	9	11
Weight (Boat Only)	600 Kg	650 Kg
No. of Air Compartments	5	5
Maximum Horse Power (Factory Fitted)	250 hp	500 hp
Recommended Power Single Engine	150 hp	175 hp
Recommended Power Twin Engine	90 hp	115 hp

Hull & Deck

- Fiberglass Deep V-Shaped Hull
- Moulded Non-Skid Deck
- Underdeck Storage
- Anchor Locker
- 1 Bow U-Bolt
- 2 Towing Rings

Tube

- ORCA PES 1100 Dtex Material, Arctic Grey Or Ocean Blue
- 5 Air Compartments
- Semi-Recessed Valves
- Polyamid Lacing Cuff and Safety Grab Line
- Large Profile all Round Double Rubbing Strake
- Reinforced Cone Ends

STANDARD EQUIPMENT

- Double Lux Console
- Double Leaning Post (only for ASCL-8.0 with Back Bench)
- Triple Seat with Swivel Back Rest
- Sunbed (only for ASCL-8.0)
- 316 SS Built-In Fuel Tank with Fuel Sender and Gauge, 225L (only for ASCL-8.0)
- Anchor Guide, Bow Step
- 3 Fish Rod Holder
- 316 SS A-Frame
- Navigation Light
- Anchor Light
- Boat Light
- Automatic Bilge Pump with Float Switch
- Self-Draining Deck
- 4 Moulded Handles
- Boat Cover
- 2 Paddles
- Air Pump
- Repair Kit
- Owner's Manual

OPTIONAL ACCESSORIES

- Engine (See Table Above)
- Sunbed for ASCL-6.5
- 316 SS Extra Fuel Tank, 225L for ASCL-8.0
- 316 SS Ladder
- 316 SS Bow Rider
- 316 SS Double Lux T-Top
- Bimini Top
- 316 SS Anchor and Chain
- GPS
- Fish Finder
- VHF Radio
- CD-Radio with 4 Marine Speakers
- Search Light
- Shower Kit Water Tank: 60L)